

**Zedex CPT High Performance Damp Proof Course**



- BBA certified and suitable for damp proofing and cavity trays in all solid/cavity wall applications
- Resistant to compression under heavy wall loading and won't extrude

Code	Width	Roll Length	Rolls Per Pack
RDHY100	100.0mm	20 Metres	1
RDHY1125	112.5mm	20 Metres	1
RDHY150	150.0mm	20 Metres	1
RDHY225	225.0mm	20 Metres	1
RDHY300	300.0mm	20 Metres	1
RDHY3375	337.5mm	20 Metres	1
RDHY450	450.0mm	20 Metres	1
RDHY600	600.0mm	20 Metres	1
RDHY900	900.0mm	20 Metres	1

**Zedex Housing Grade Damp Proof Course**



- Domestic grade polymeric DPC and BBA certified
- Ideal for damp proofing solid and cavity walls in brick, block, stonework or concrete
- No extrusion under heavy loads and usable under concrete floor beams

Code	Width	Roll Length	Rolls Per Pack
RDHYB100	100.0mm	20 Metres	1
RDHYB1125	112.5mm	20 Metres	1
RDHYB150	150.0mm	20 Metres	1
RDHYB225	225.0mm	20 Metres	1
RDHYB300	300.0mm	20 Metres	1
RDHYB450	450.0mm	20 Metres	1
RDHYB600	600.0mm	20 Metres	1
RDHYB900	900.0mm	20 Metres	1

**Polyethylene Damp Proof Course**



- Cost effective damp proof course for domestic construction
- Suitable for use in horizontal and vertical applications
- Safe and clean to handle and flexible even at low temperatures

Code	Width	Roll Length	Rolls Per Pack
RDPO100	100.0mm	30 Metres	9
RDPO1125	112.5mm	30 Metres	8
RDPO150	150.0mm	30 Metres	6
RDPO225	225.0mm	30 Metres	4
RDPO300	300.0mm	30 Metres	3
RDPO3375	337.5mm	30 Metres	3
RDPO450	450.0mm	30 Metres	2
RDPO600	600.0mm	30 Metres	2
RDPO900	900.0mm	30 Metres	1

**Insulated Damp Proof Course**




- Polyethylene insulated DPC developed to close masonry cavities around window and door reveals
- Easy to install and complies with Part L of Building Regulations under certain conditions

Code	Insulation	DPC Width	Roll Length	Rolls Per Pack
RDPV165	17mm x 100mm	165mm	10 Metres	6
RDPV225	17mm x 140mm	225mm	10 Metres	5

**Cavity Closers**



- Multi-width cavity closer to suit cavity widths between 50-100mm and 100-150mm
- Economical solution to cold bridging problems
- Provides a thermal break to the cavity and also acts as an effective DPC barrier
- These closers can be cut to suit varying cavity widths
- Complies with Part L of Building Regulations and achieves the required U value at the reveal of the door and window openings when the frames are fixed to allow a 30mm overlap into the cavity

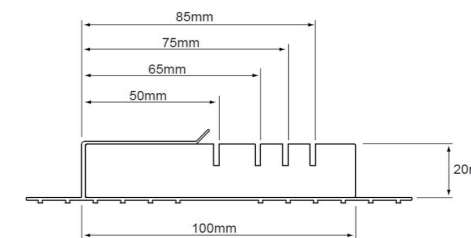

Code	To Suit Cavity	Length	Colour of Extrusion	Pack Quantity
RCCU1002440	50mm - 100mm	2.44 Metres	White	6
RCCU1502400	100mm - 150mm	2.44 Metres	White	6

**Polythene Film**



- Temporary protection sheeting and damp proof membrane
- DPM is all BBA certified
- DPM is used to prevent moisture penetration from floors
- For jointing tape (DPC/DPM/Radon) please see our Sealants section



Code	Description	Approx Roll Weight	Approx Thickness	Width x Length	Colour	Rolls Per Pack
RDSPT0254040	Light Duty Prot Sheet	N/A	N/A	4 x 25 Metres	Clear	1
RDSPT0254060	Medium Duty Prot Sheet	N/A	N/A	4 x 25 Metres	Clear	1
RDSPT0504060	Medium Duty Prot Sheet	11kg	62.5mu	4 x 50 Metres	Clear	1
RDSPT0254120	Heavy Duty Prot Sheet	11kg	120mu	4 x 25 Metres	Clear	1
RDSPD0254250	Blue DPM with BBA Cert	23kg	250mu	4 x 25 Metres	Blue	1
RDSPB0254250	Black DPM with BBA Cert	23kg	250mu	4 x 25 Metres	Black	1
RDSPD0254300	Blue DPM with BBA Cert	27kg	300mu	4 x 25 Metres	Blue	1
RDSPB0254300	Black DPM with BBA Cert	27kg	300mu	4 x 25 Metres	Black	1