

SELF TAPPING MASONRY SCREWS

TORX T30 HEAD
Easy to fix and less likely to 'cam out'

HARDENED STEEL
Greater loading performance than most nylon fixings

FRICITION FIXING
Prevents stress in the material

HIGH FIRE RESISTANCE
Greater fire resistance than nylon fixings

DEEP THREAD
For high pull out resistance


ZINC & YELLOW PASSIVATED
For corrosion resistance

SELF TAPPING SCREW
No need for plastic plugs




INSTALLATION


Drill at right angles using drill bits of the same diameter ensuring the hole is slightly deeper than the screw and fixture combined

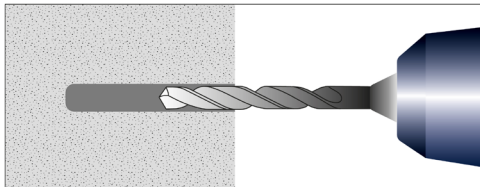

Remove any loose dust from the hole

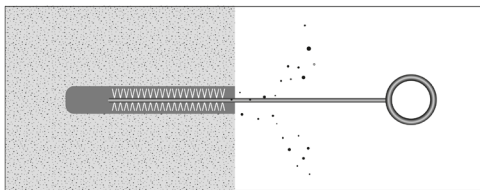

Screw in using an appropriate driver and tighten until the fixture is in place

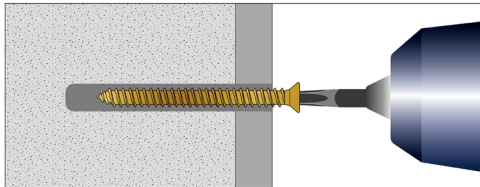

IDEAL FOR USE WITH IMPACT DRIVERS



Code	Size (mm)	Drill Hole Dia. (mm)	Max. Fixture Thickness (mm)	Min. Hole Depth (mm)	Box Qty	Outer Qty
MVFMS75040	7.5 x 42	6	-	45	100	1000
MVFMS75050	7.5 x 52	6	10	45	100	1000
MVFMS75060	7.5 x 62	6	20	45	100	1000
MVFMS75070	7.5 x 72	6	30	45	100	1000
MVFMS75080	7.5 x 82	6	40	45	100	1000
MVFMS75090	7.5 x 92	6	50	45	100	1000
MVFMS75100	7.5 x 102	6	60	45	100	1000
MVFMS75110	7.5 x 112	6	70	45	100	1000
MVFMS75120	7.5 x 122	6	80	45	100	800
MVFMS75130	7.5 x 132	6	90	45	100	800
MVFMS75150	7.5 x 152	6	110	45	100	800
MVFMS75180	7.5 x 182	6	140	45	100	600
MVFMS75200	7.5 x 202	6	160	45	100	600
MVFMS75200	T30 Screwdriver Bits				20	-

FREE DRIVER & CAPS
Included in all boxes

